
U9C4012S, Isolation Power-over-Ethernet Plus (PoE+) PD Module

Product Description

The U9C4012S is an isolation, regulated DC-DC converter for power-over-ethernet plus (PoE+) that has a wide input range, 42~57V, and produces 30W of peak output power, yielding an excellent power density.

The U9C4012S is designed for IEEE 802.3af/at compliant devices and it has self-protection features, including input under-voltage lockout, input overvoltage lockout and over temperature shutdown, overcurrent protection with hiccup, and the output may be short-circuited indefinitely. Moreover, the synchronous rectifier flyback topology offers high efficiency to minimize the heat in no fan operation.

Features

- IEEE802.3af/at compliant
- 25.5W DC-DC converter
- 42~57 input voltage range
- 88% efficiency
- OCP/OVP/OTP protection
- 1500Vdc input-to-output isolation
- 58mm x 14mm x 16mm size
- Operating temperature range -20°C to +55°C

Applications


- IEEE802.3af/at compliant devices
- Security camera
- VoIP phone
- WLAN access points
- IoT devices

Ordering Information

Models				
Part Number	Input voltage range	Output voltage range	Output wattage	Efficiency typ.
U9C4612	42 ~ 57V	12V	12.95W	87%
U9C4012S	42 ~ 57V	12V	25.5W	88%
U9C4040	42 ~ 57V	40V	25.5W	90.5%
U9C4812	42 ~ 57V	12V	62W	91%
U9C4824	42 ~ 57V	24V	62W	91.5%

Note: All specifications are at nominal line voltage, full load, 25°C, unless otherwise stated.

Package Reference

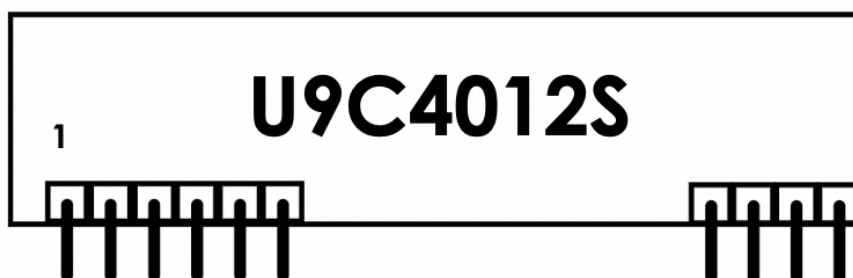

Pin Functions

Input/Output connections		
Pin	Designation	Function
1	+Vin	Positive Input Voltage
2	-Vin	Negative input Voltage
3~6, 9	NC	N/A
7	-Vout	Negative Output Voltage
8	+Vout	Positive Output Voltage
10	-Vout	Negative Output Voltage

U9C4012S Electrical Characteristics

Absolute	Conditions	Min	Typ	Max	Units
Input Voltage		42		57	Vdc
Input Surge Voltage	1 sec or 100ms			60	Vdc
Isolation Voltage (input/output)	Impulse test			1500	Vdc
Continuous Output Power		25.5			W
Peak Output Current				2.5	A
Operating temp		-20		55	°C
Storage temp	Vin=zero	-40		85	°C
Input					
Operating Voltage		42	48	57	Vdc
Input Undervoltage Turn-on	1 sec		37.5		Vdc
Input Undervoltage Turn-off			30.5		Vdc
Input Quiescent	Vin=48V, EN=0V		1		mA
On Resistance of Internal Hotswap			0.48		ohm
Output					
Voltage Accuracy		-3		+3	%
Efficiency – Full load	Vin=48V, Iout=2.125A		88		%
Efficiency – Half load	Vin=48V, Iout=1.0625A		88		%
Line Regulation	Low line to high line @full load	-0.5		+0.5	%
Load Regulation	No load to full load	-1		+1	%
Ripple Noise	Cout=0.1uF 50V		300	400	mVp-p
Temperature Coefficient		-0.02		0.02	%/°C
Over Voltage Protection	Hiccup		16		Vdc
Short Circuit Protection	Hiccup				
Maximum Load Cap	Low ESR			10,000	μF


Note: All specifications are at nominal line voltage and at 25°C, unless otherwise stated and for design reference only.

U9C4012S Electrical Characteristics (CONT.)

General	Conditions	Min	Typ	Max	Units
Over Temperature Protection			125		°C
Switching Frequency			250		KHz
ESD			RoHS-6		
RoHS Rating			RoHS-6		


Note: All specifications are at nominal line voltage and at 25°C, unless otherwise stated and for design reference only.

U9C4012S Typical Performance Curves

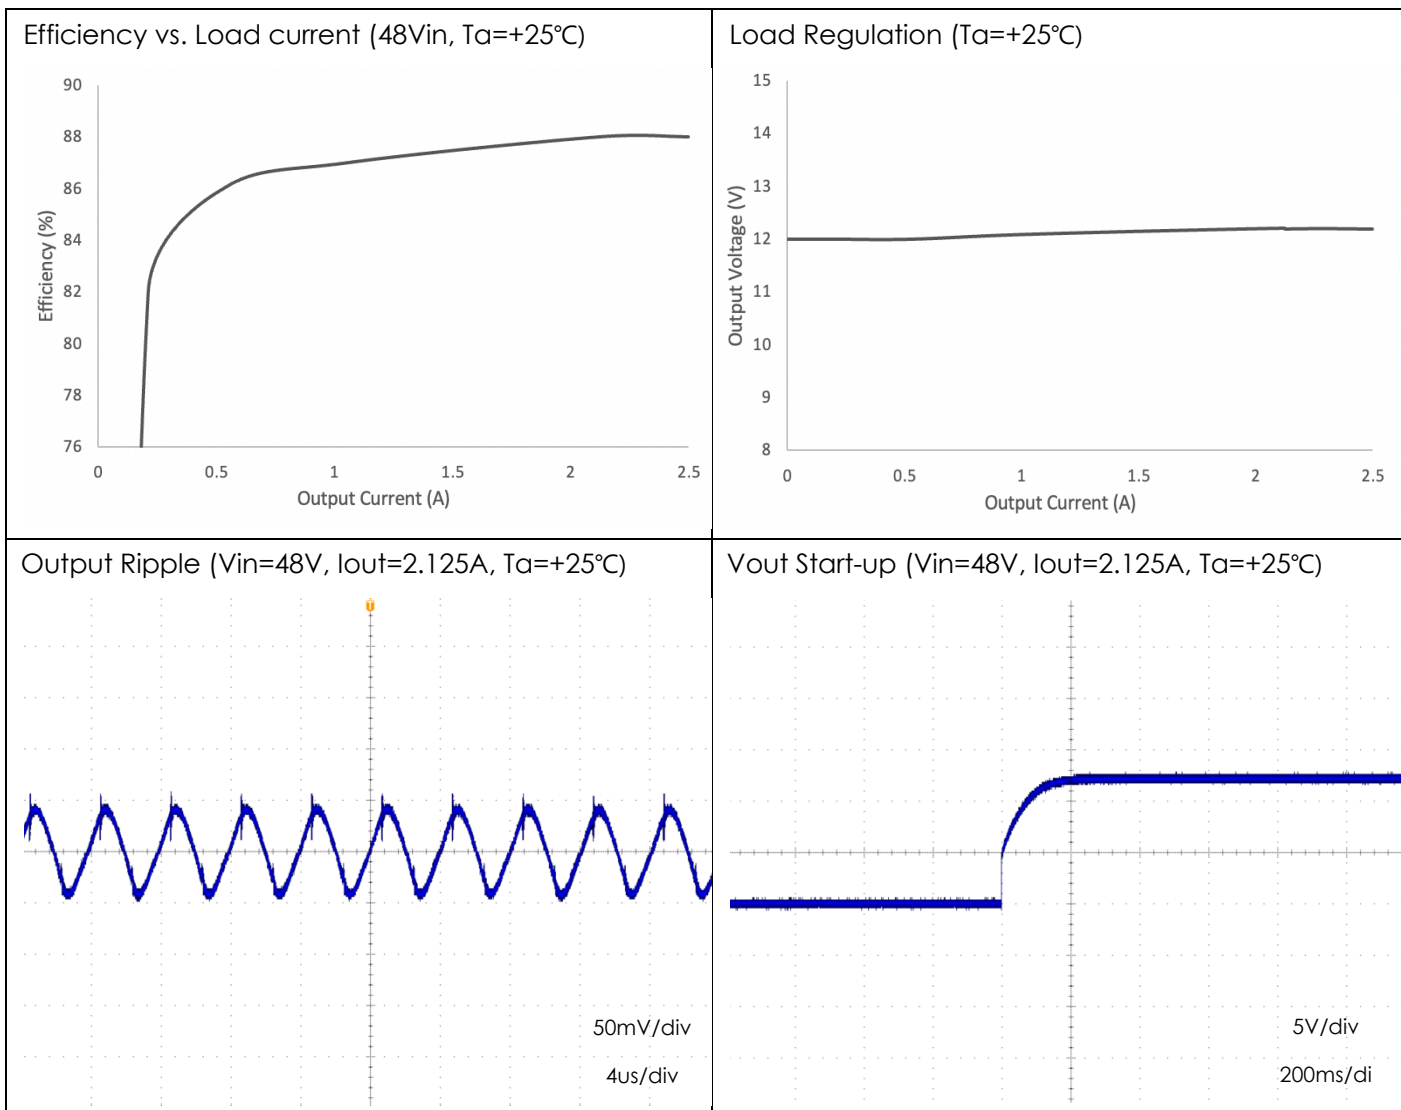


Operating Thermal Range

U9C4012S is capable of handling 25.5W continuous power, like any other power component, it will generate heat and de-rate with operating temperature as profile of figure below. It's important that this be taken into consideration at design phase.

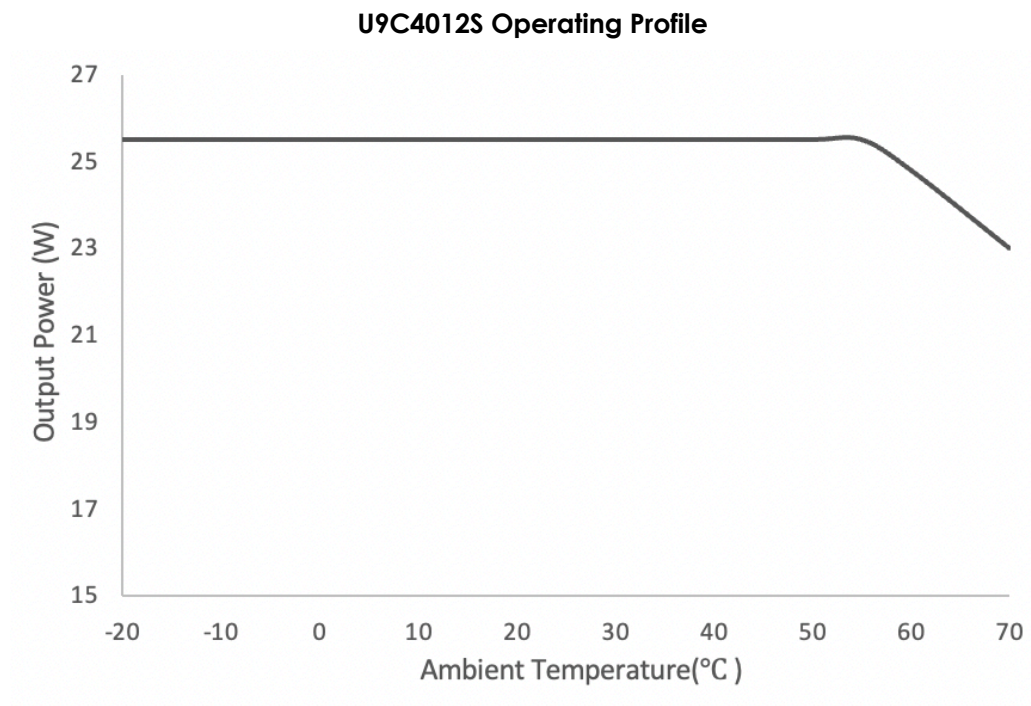

Connection with 1000BASE-T Ethernet

Unlike 10BASE-T and 100BASE-T uses all four cable pairs for transmission in both directions, the additional data pairs are added. The following diagram shows how to connect modules to support 1000BASE-T Ethernet.

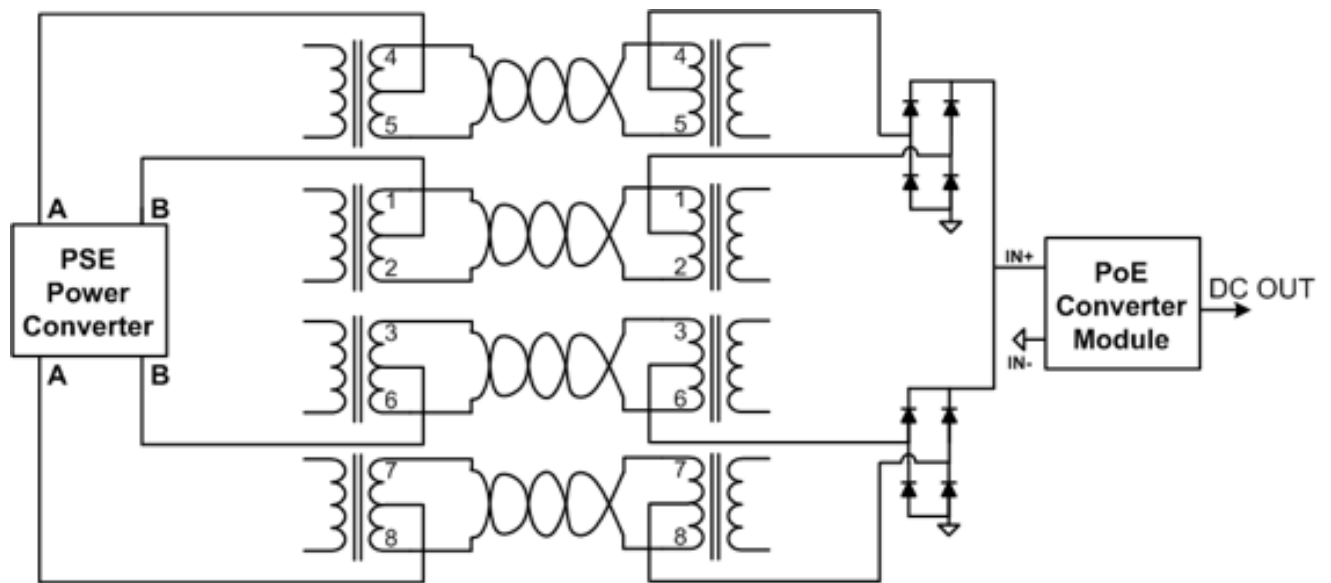

Product Dimension

